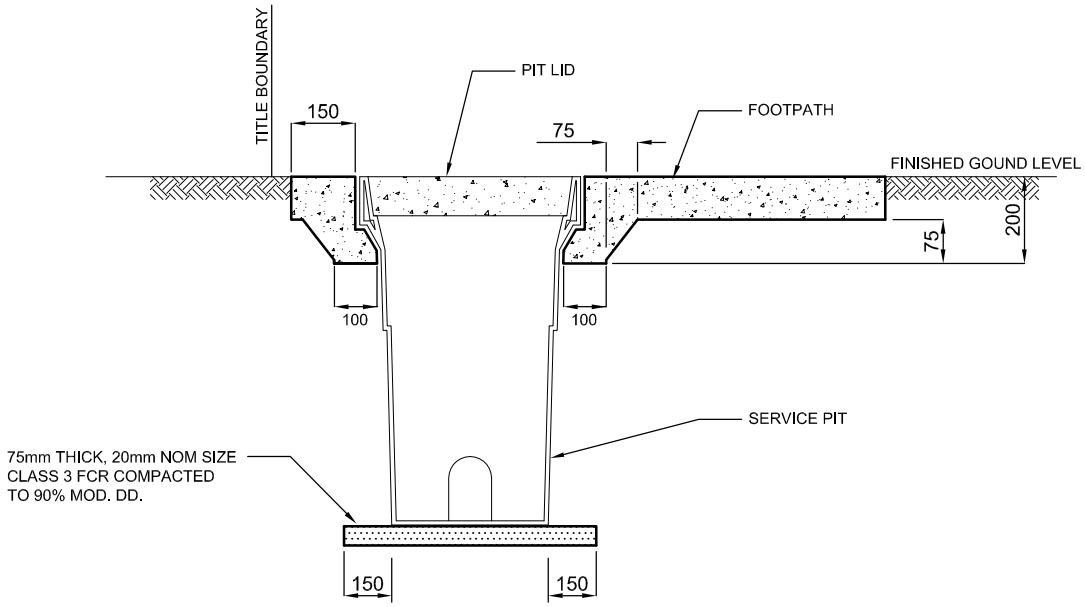

SECTION A-A

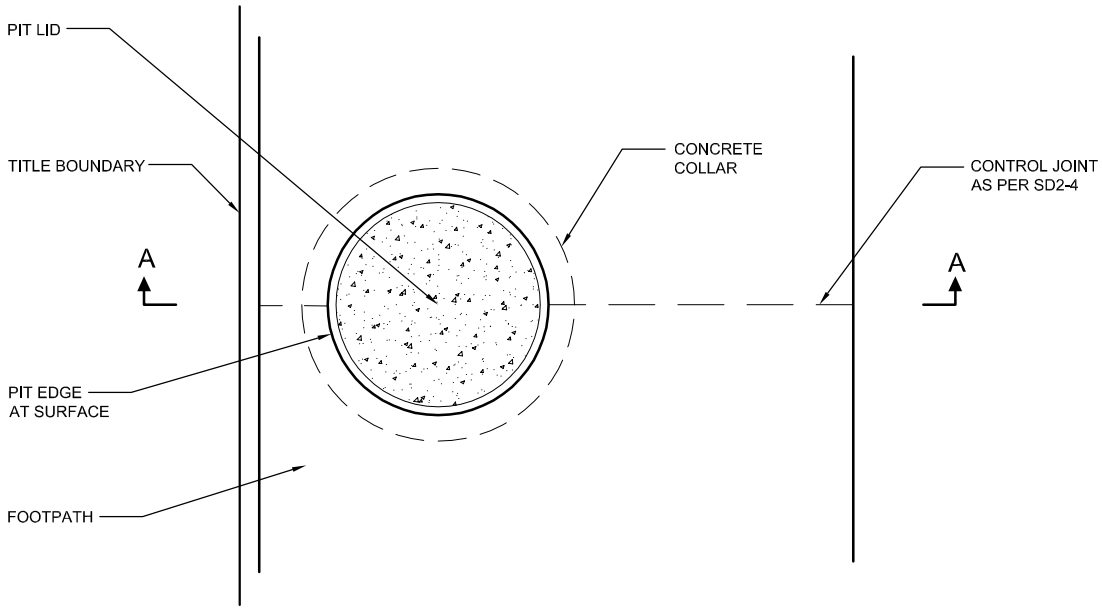

PLAN

NOTES :

1. THE SERVICE PIT IS TO BE INSTALLED WITH ITS OUTER EDGE NOT LESS THAN 150mm FROM THE EDGE OF THE FOOTPATH.
2. THE CONCRETE COLLAR SUPPORT IS TO BE 200mm THICK WITHIN THE FOOTPATH.
3. FOOTPATH REINFORCEMENT TO BE CONTINUOUS ON ALL SIDES OF THE PIT.
4. MINIMUM FOOTPATH REINSTATMENT TO BE 1200mm WIDE.
5. CONCRETE STRENGTH OF 25MPa AT 28 DAYS.

Rev	Amendments	Approved	Date
B	Edited Notes 01 & 02. Minor drafting modifications. Renamed (prev. SD5-18)		20-06-09

WYNDHAM CITY COUNCIL

INSTALLATION OF ELECTRICAL PIT IN FOOTPATH

Engineering Services Approval No.: ES001 | Date : 21/05/09

Cad File : SD2-6.DWG
Drawn Date : 02/02/09
Revision : B
Drawing No. SD2-6

GENERAL NOTES:
-DRAWINGS ARE NOT TO SCALE.
-ALL MEASUREMENTS ARE IN MILLIMETERS UNLESS OTHERWISE STATED.
-FOR UP TO DATE DRAWINGS PLEASE CHECK WYNDHAM CITY COUNCIL WEB SITE.
-ALL STANDARD DRAWINGS TO BE USED IN CONJUNCTION WITH SD1-1 (STANDARD DRAWINGS CONDITIONS OF USE).

Drawing name: I:\Roads Shared\Standard Drawings May 2009\AutoCad Version\SD2-6.dwg (01 Jun, 2009)