



SECTIONAL VIEW

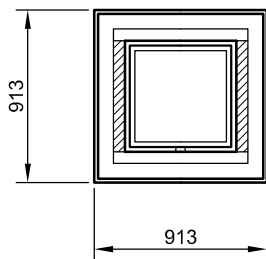

PLAN OF SURROUND

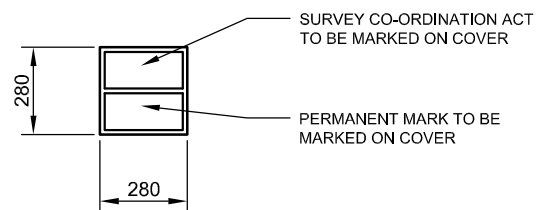

COVER DETAILS

COVER AND LID FOR SURVEY MARKS TYPE A1

NOTES :

1. PSM TO BE LOCATED WITHIN FOOTPATH AREA..
2. LEVEL TO BE REDUCED TO A.H.D.
3. REFERENCE TO BE TO A.M.G. CO-ORDINATES.
4. CONCRETE STRENGTH OF 25MPa AT 28 DAYS.
5. LEVELS & COORDINATES TO BE LODGED WITH WYNDHAM CITY COUNCIL'S ROADS DEVELOPMENT DEPARTMENT.

Drawing name: I:\Roads Shared\Standard Dwg Review 2007\SD11-10.dwg (22 May, 2009)

Rev	Amendments	Approved	Date
B	Deleted (notes 03, 04), Edited (Title) Minor drafting modifications		17-07-07



**PERMANENT SURVEY MARK
HIGH STABILITY**

Engineering Services Approval No.: ES001

Date: 21/05/09

Cad File : SD11-10.DWG
Drawn Date : 02/02/09
Revision : B
Drawing No. SD11-10

GENERAL NOTES:
 -DRAWINGS ARE NOT TO SCALE.
 -ALL MEASUREMENTS ARE IN MILLIMETERS UNLESS OTHERWISE STATED.
 -FOR UP TO DATE DRAWINGS PLEASE CHECK WYNDHAM CITY COUNCIL WEB SITE.
 -ALL STANDARD DRAWINGS TO BE USED IN CONJUNCTION WITH SD1-1 (STANDARD DRAWINGS CONDITIONS OF USE).