


SECTION A - A

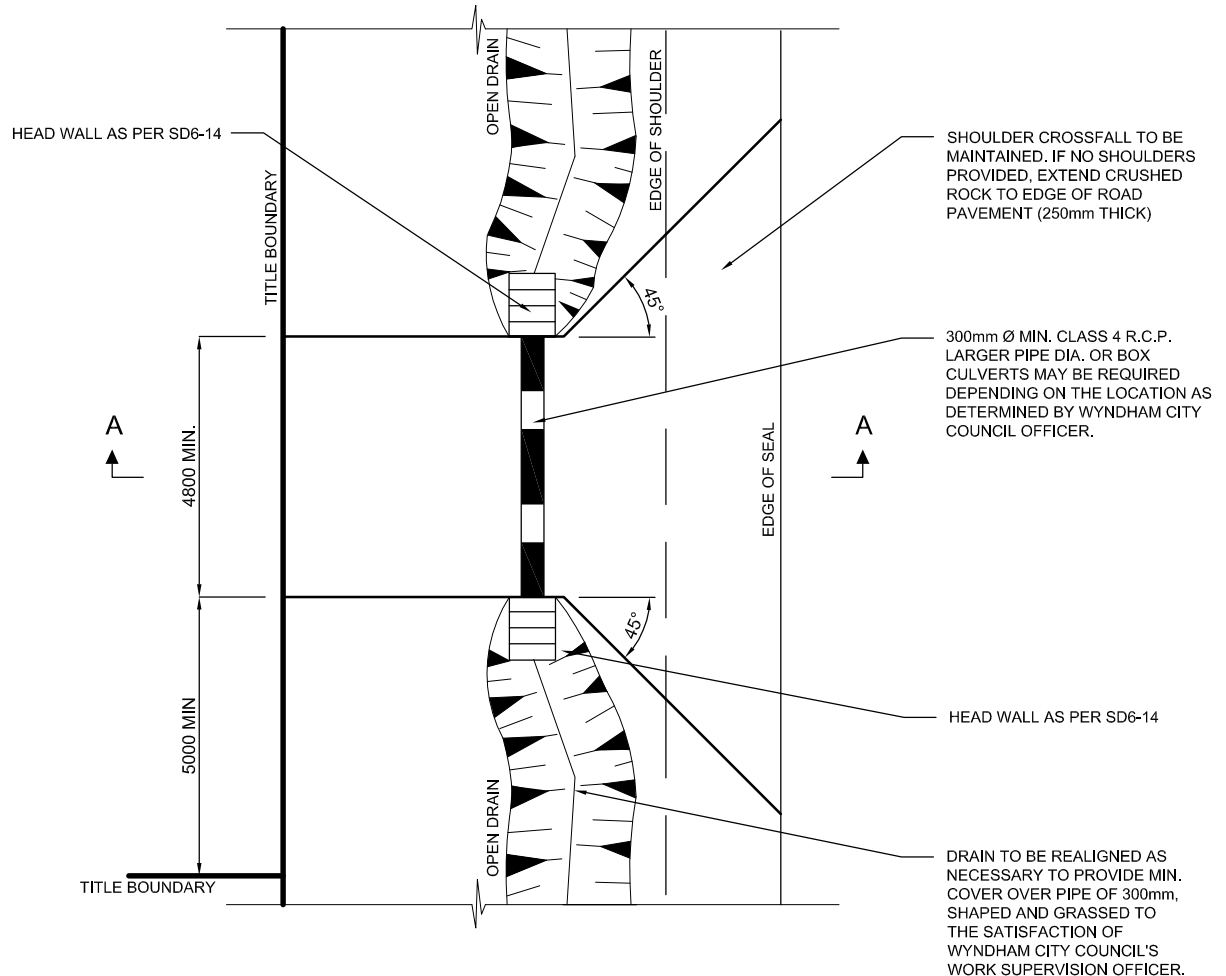

PLAN

NOTES :

1. INVERT LEVEL OF PIPE/CULVERT TO MATCH EXISTING INVERT LEVEL OF OPEN DRAIN UNLESS OTHERWISE SPECIFIED BY WYNDHAM CITY COUNCIL OFFICER.
2. 300mm MINIMUM COVER TO TOP OF PIPE.
3. 100mm MINIMUM BEDDING DEPTH.
4. CONCRETE STRENGTH OF 25MPa AT 28 DAYS.

Drawing name: I:\Roads Shared\Standard Dwg Review 2007\SD4-6.dwg (22 May, 2009)

Rev	Amendments	Approved	Date
B	Trench shape changed to have vertical edges. Minor drafting modifications.		05-07-07



RURAL VEHICLE CROSSING	
Engineering Services Approval No.: ES001	Date: 21/05/09

Cad File : SD4-6.DWG
Drawn Date : 02/02/09
Revision : B
Drawing No. SD4-6

GENERAL NOTES:

- DRAWINGS ARE NOT TO SCALE.
- ALL MEASUREMENTS ARE IN MILLIMETERS UNLESS OTHERWISE STATED.
- FOR UP TO DATE DRAWINGS PLEASE CHECK WYNDHAM CITY COUNCIL WEB SITE.
- ALL STANDARD DRAWINGS TO BE USED IN CONJUNCTION WITH SD1-1 (STANDARD DRAWINGS CONDITIONS OF USE).