
## SUBSURFACE DRAIN AT INTERSECTING PAVEMENTS

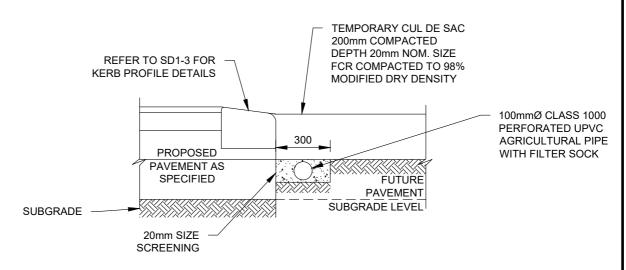

## **TEMPORARY EDGE STRIP**

## NOTES:

2025)

- PAVEMENT PERMEABLE SUB-BASE TO EXTEND OVER AGRICULTURAL DRAINS .
- THICKNESS OF PERMEABLE SUB-BASE AND SHOULDER AS PER DRAWINGS. 2
- 3. MINIMUM GRADE OF SUBSURFACE DRAINS TO BE 1 IN 300.
- WHERE AGRICULTURAL DRAINS TO BE PROVIDED UNDER KERB, NO FINES CONCRETE TO BE 4. USED AS BACKFILL.
- TEMPORARY SUBSURFACE DRAIN & KERB TO BE REMOVED WHEN FUTURE PAVEMENT IS BEING CONSTRUCTED.

rences\WCC Standard Drawings\SD7-2.dwg (27 Mar, 2	REFER TO SD1-3 F KERB PROFILE DETA  PROPOS PAVEMEN SPECIF  SUBGRADE  20mm SIZE SCREENING	MODIFIED DRY DENSITY  300 SED THE PAVEMENT SUBGRADE LEVEL	00mmØ CLASS 1000 PERFORATED UPVC AGRICULTURAL PIPE WITH FILTER SOCK
Refer	TEMPORARY EDGE STRIP		
Services\Engineering Design Projects\RESOURCE References\WCC Standard Drawings\SD7-2.dwg			
Engineering	REV         AMENDMENTS         APPROVAL         DATE           A         DELETED AND EDITED NOTES, ADDED 3%         22-04-2007	SUBSURFACE DRAINAGE	CAD FILE: SD7-2.DWG
gine	B         MINOR DRAFTING MODIFICATIONS         19-06-2007           C         MINOR DRAFTING MODIFICATIONS         12-01-2010           D         UPDATED TO REFLECT CURRENT STANDARDS         M.BRIGANDI         21-05-24	COBCOTA ACE DIVATOR	DRAWN DATE: FEB 2024
!∖En	E MINOR DRAFTING UPDATES M.BRIGANDI 27-03-25	45 PRINCES HICHWAY TEL: 1300 023 411	REVISION: E
name: M:\		yndhamcity werribee, VIC 3030 wyndham.vic.gov.au	DRAWING NO.: SD7-2
g	GENERAL NOTES: -DRAWINGS ARE NOT TO SCALE.		

-ALL MEASUREMENTS ARE IN MILLIMETERS UNLESS OTHERWISE STATED. -FOR UP TO DATE DRAWINGS PLEASE CHECK WYNDHAM CITY COUNCIL WEBSITE.

-ALL STANDARD DRAWINGS TO BE USED IN CONJUNCTION WITH SD1-1 (STANDARD DRAWINGS CONDITIONS OF USE).